


HF-PG1 Wireless Gateway

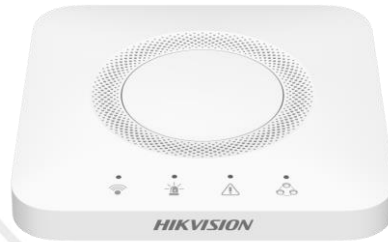

- Ultra slim design, only 15mm thick.
- Up to 30 nodes can be stably connected via the HF-Link wireless interconnection technology.
- Supports 2.4 GHz Wi-Fi connection and access to Hik-Protect app.
- 4-color status indicator light for quick system status check.
- Support one-touch muting and pairing, splash-proof, and convenient on-site management.

▪ Specification

Model		HF-PG1
Key Feature	Maximum Number of Interconnected Units	30 PCS
	Alarm Indicator Light	Red
General	Power	HF-PG1:DC 5V DC 5V, Type-C
	Communication Mode	HF-PG1: HF-PG1-WF/R8(O-STD):Wi-Fi,868 HF-PG1-WF/R(O-STD):433,Wi-Fi HF-PG1-WF/R9(O-STD):Wi-Fi,915
	Status Indicator Light	HF-PG1:Green Blue: wifi connection ; Red: alarm ; Yellow: fault ; Green: pairing
	Working Temperature	-10 °C~ 55 °C
	Working Humidity	5%~95% (non-condensing)
	Weight	96 g (device only)
	Dimension (L × W × H)	90 mm * 90 mm * 15.2 mm
	Installation	Desktop
	Communication Distance	HF-PG1:Wi-Fi: 50m sub1g: 1000m Wi-Fi: 50m sub1g: 1000m (in open space and without nearby frequency band interference)
	Volume	HF-PG1:80 dB @ 1m 80 dB @ 1m

▪ Available Model


HF-PG1-WF/R9

HF-PG1-WF/R8

HF-PG1-WF/R8/Component

HF-PG1-WF/R

▪ Dimension

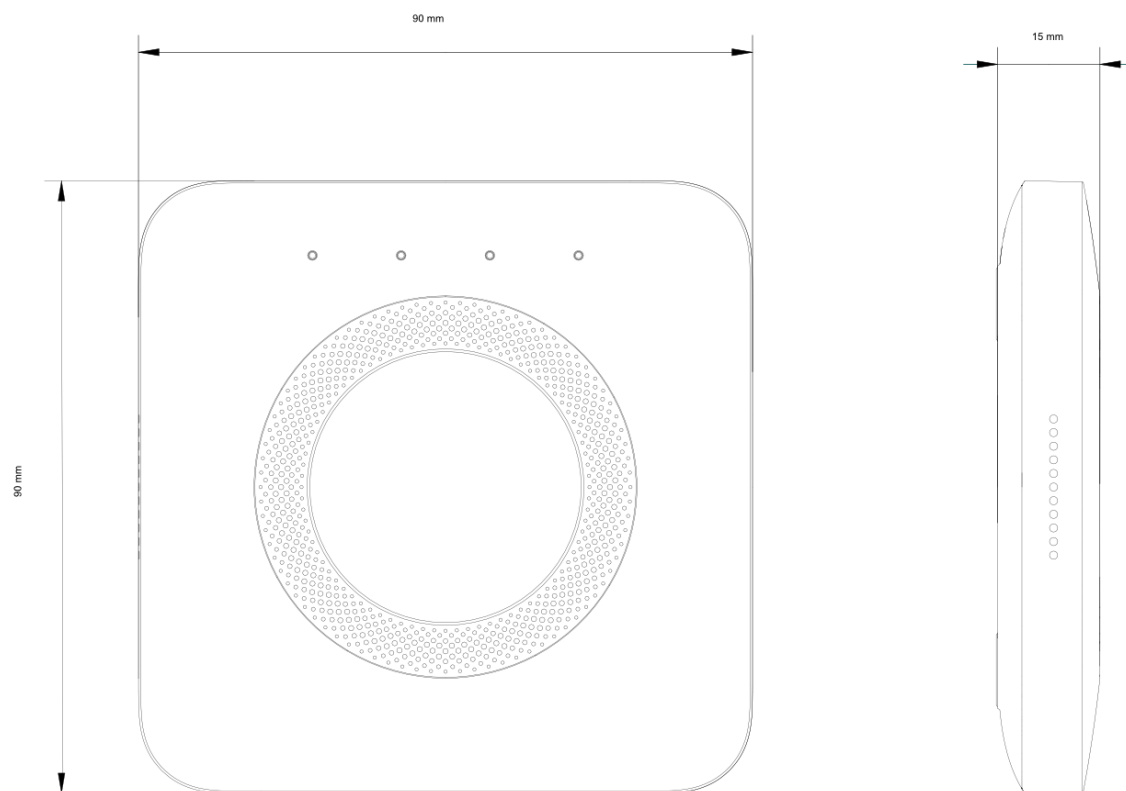

Safer Place Better Life

Headquarters

Address: Room 311, Unit B, Building 2, No.399,
Danfeng Road, Binjiang District, Hangzhou City,
Zhejiang Province, China
Tel: 0086 400-800-5998
www.hikvision.com